


Portable Ground Monitors

Style 600-1 & 600-2

- Highly manoeuvrable, operating like handline nozzles while delivering much more water
- Compact and lightweight with a low-profile design for stable operation
- Simple to set up for quick attack operations, and can be left unmanned at the fire scene to conserve manpower
- Flow rate of up to 500 GPM (1900 LPM)
- Horizontal rotation is adjustable 20° each side of centre
- Elevation is adjustable from 30° to 60° unmanned and down to 20° when manned
- Monitor body is constructed in hardcoat anodized aluminium with tough powder coating
- Ball shutoff with locking handle
- Carbide-tipped spikes at the base is resistant to long-term wear and provide excellent ground stability
- Large handle for excellent portability

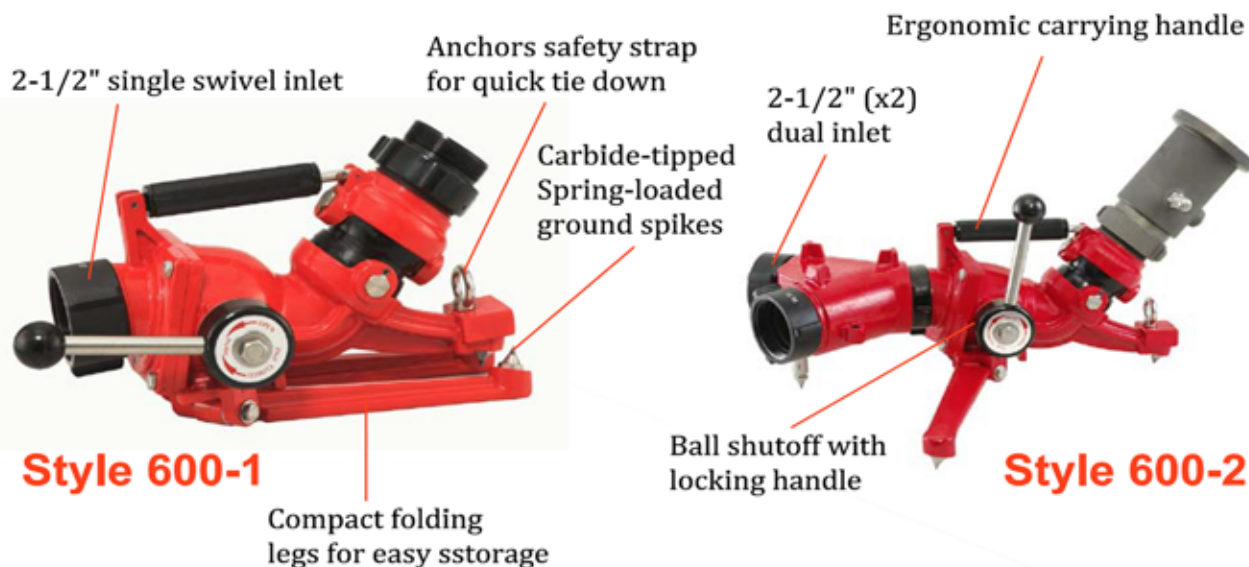

600-1 Single-Inlet Portable Ground Monitor
600-2 Dual-Inlet Portable Ground Monitor

